

TeleTouch 27 USB

TOUCH-SCREEN MULTIVIEW DISPLAY FOR MATRIXMIX PRODUCTS

ORDERING INFORMATION

999-80000-027 (All Locations)

FEATURES

- Provides an intuitive visual user interface for live production environments
- Our largest multiview display, offering full HD resolution (1080p/60)
- Designed for use with the AV Bridge MatrixMIX and PCC MatrixMIX products
- Shows the video available from each source, with program and preview clearly identified
- Operator can see what the audience sees, including manual transitions
- High-precision capacitive touch-screen does not respond to accidental contact with objects; requires fingertip contact
- Base tilts up to 90°




CONNECTOR PANEL

- Power connector – Unit ships with the appropriate cord set(s) for the locale
- DisplayPort – Not used with MatrixMIX products
- HDMI – Connect to the multiviewer output on the AV Bridge MatrixMIX as a visual, touch-based operator's interface for live events
- VGA – Not used with MatrixMIX products
- Audio – Not currently used with MatrixMIX products
- USB 2.0 – Connect to the USB 2.0 output on the AV Bridge MatrixMIX; generates USB control from touch screen events

TeleTouch 27 USB

CONNECTIONS

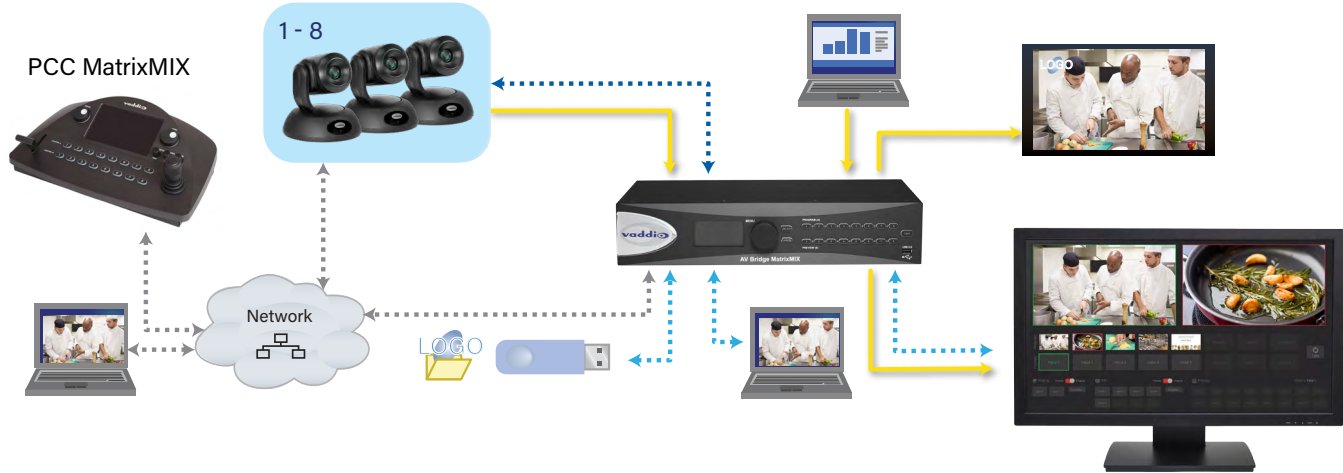

TECHNICAL SPECIFICATIONS

Display and Product Compatibility

Maximum resolution	1080p/60 (Full HD)	Touch-screen type	Surface capacitive
Aspect ratio	16:9	Color depth	32 bit (16.7 million colors)
Viewing angle	178° x 178°	Brightness	350 nits
Compatibility	AV Bridge MatrixMIX, PCC MatrixMIX Not for use with the ProductionVIEW product line		

Power, Environmental, and Physical

Power requirement	90 to 240 VAC	Maximum power consumption	60W
Operating temperature	0 to 50C (32 to 122F)	Storage temperature	-20 to 60C (-4 to 140F)
Humidity	5-90% relative, noncondensing	Weight	14.7 lbs. (6.66kg)
Dimensions	25.51 in. (W) x 15.23 in. (H) x 2.48 in. (D) (648 x 389 x 63mm)		

Specifications are subject to change without notice

WHAT'S IN THE BOX:

The TeleTouch 27 USB multiviewer ships with the following items:

- TeleTouch 27 USB touch-screen display with base
- AC cord set(s)
- USB 2.0 cable, 4ft (1.2m)
- HDMI cable, 4ft (1.2m)