

Vivitek DU775Z-UST


WUXGA Ultra-Short-Throw Laser projector with High Brightness and Long Operation Hours.



Features

- DLP® and BrilliantColor™ advanced technology.
- 5000 ANSI lumens with a crisp 3,000,000:1 Contrast Ratio.
- Native WUXGA (1920 x 1200) resolution with a maximum display compatibility up to UHD (3840 x 2160) @60Hz.
- High Standard Anti-Dust compliance – extend operation life.
- Support Large Screen projection 70"~150" without image distortion (<0.95%).
- Excellent color performance- covered <93% color Gamut of Rec.709
- 360° angle Free, Keystone to adjust and maximize setup flexibility to fit your environment.
- HDMI v2.0 available for 4K-UHD signal input.
- Crestron® RoomView certified for easy communications and remote control over an IT network.
- Smart Control- Quick Auto Search for locate input signal source, Direct Power-On, Signal Power-On.
- Power USB-A ports enables connection of HDMI based multimedia or wireless collaboration devices.
- Optional accessories Interactive module- IR pen or Finger Touch mode.
- Security concerned- Keypad Lock, Password Lock, Kensington's lock slot.
- Eco- Friendly designed- No Signal Power-Off, Low Power Mode, RoHS compliant.

Photos

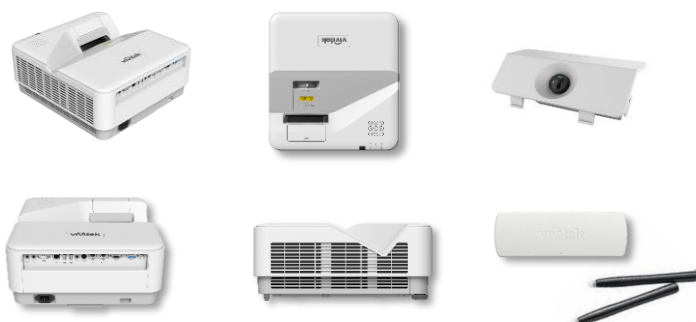

Specifications

Display Type	Single Chip 0.47" DLP Technology
Brightness (ANSI*)	5000 ANSI Lumens
Native Resolution	WUXGA (1920 x 1200)
Maximum Resolution Compatibility	UHD (3840 x 2160) @60Hz
Dynamic Contrast Ratio	Over 3,000,000:1
Light Source Life/Type	20,000 / 30,000 Hours (Normal/Eco)
Throw Ratio	0.25:1
Image Size (Diagonal)	70" - 150" (100% Focus)
Projection Distance	336mm~739mm
Projection Lens	Manual Focus
Zoom Ratio	Fixed
Aspect Ratio	16:10 Native
Offset	122%±5%
Keystone Correction	V : +/- 15 steps
Horizontal Frequency	15, 31 - 102kHz
Vertical Scan Rate	24 - 30Hz, 47-120Hz
3D Functionality	Yes (Supports DLP Link, Blu-Ray 3D)
Speakers	10W x2
Video Compatibility	SDTV (480i, 576i)/EDTV (480p, 576p) / HDTV (720p, 1080i, 1080p), NTSC (M,3.58/4.43 MHz), PAL (B,D,G,H,I,M,N) SECAM (B,D,G,K,K1,L)
Computer Compatibility	VGA, SVGA, XGA, SXGA, SXGA+,WUXGA, UXGA,4k @60hz, Mac
I/O Connection Ports	HDMI v2.0 (x2) (HDCP v2.2 Compliant), HDMI-out x1,VGA-In, Audio-In RCA (L/R), Audio-In (Mini-Jack), VGA-Out,Audio-Out (Mini-Jack), RJ45, RS-232, USB-Type A Power x1 (5V/2A), USB-Type A x1 USB (Service)
Projection Method	Table Top, Ceiling Mount (Front or Rear)
Security Solutions	Kensington® Security Slot, Keypad Lock
Dimensions (WxDxH)	380mm*405mm*150mm (Non-central lens)
Weight	8.9kg
Available Colors	Two-Tone: White/Gray
Noise Level	32dB/27dB (Normal/Eco. Mode)
Power Supply	AC 100-240V, 50/60Hz
Power Consumption	340W (Normal Mode), 290W (Eco. Mode), <0.5W (Standby Mode)
Standard Accessories	AC Power Cord, Remote Control, Documentation Kit
Optional Accessories	Interactive Module (IR Pen or Finger Touch), VWD-01 Wireless Display Module

* Note: Brightness specifications are in compliance with ISO 21118 standards

©2022 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.

